

SERIES B30




Weighing scale - Pesage simple

Weighing scale

Capacity from 3kg to 30 kg
 OIML Approval up to 3.000 divisions
 Internal resolution 1/1.000.000
 IP44 protection
 Stainless steel pan, size : 300x230mm
 Backlight LCD display with 24 mm digits
 Application : Basic weighing (Zero, tare, gross), net, parts counting, check weighing
 Overload protection, Bubble level
 Weight in g, kg, t, lb and oz
 Adjustable feet
 Operating temperature range : from 0°C to +40°C
 Battery provides up to 90 hours of continuous use,
 Power supply : 9 V, AC adaptor
 Optional RS232 output

Pesage simple

Capacité de 3kg à 30kg
 Nombre de divisions : 3.000 OIML
 Précision d'affichage : 1/1.000.000
 Protection IP44
 Plateau en acier inoxydable, dimensions : 300x230mm
 Ecran LCD rétro-éclairé, digits de 24mm
 Fonctions : pesage simple (zéro, tare, brut, net), comptage, contrôle de remplissage
 Protection contre des surcharges, Niveau à bulle,
 Affichage poids en g, kg, t, lb et oz
 Pieds ajustable en hauteur
 Température de fonctionnement : de 0°C à +40°C
 Batterie rechargeable, autonomie de 90 heures, alimentation 9 V avec adaptateur AC
 Sortie RS232 en option

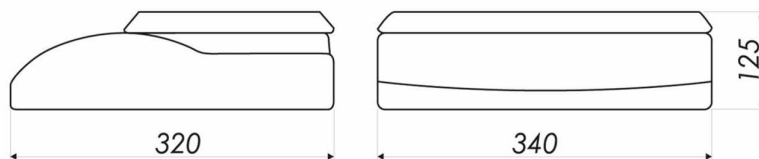

Technical parameters - Paramètres techniques

Model	Description	Capacity (kg)	Readability (g)	Pan size (mm)	Packing size (mm)
Référence	Description	Portée (kg)	Précision (g)	Dimensions du plateau (mm)	Dimensions emballage (mm)
B30-3		3	0,5 / 1	300x230	445x375x225
B30-6		6	1 / 2	300x230	445x375x225
B30-15		15	2 / 5	300x230	445x375x225
B30-30		30	5 / 10	300x230	230x375x225
B30-3R		3	0,5 / 1	300x230	445x375x225
B30-6R		6	1 / 2	300x230	445x375x225
B30-15R		15	2 / 5	300x230	445x375x225
B30-30R		30	5 / 10	300x230	230x375x225
	with/avec RS232				